


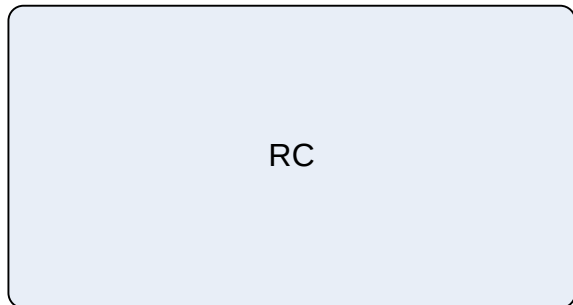

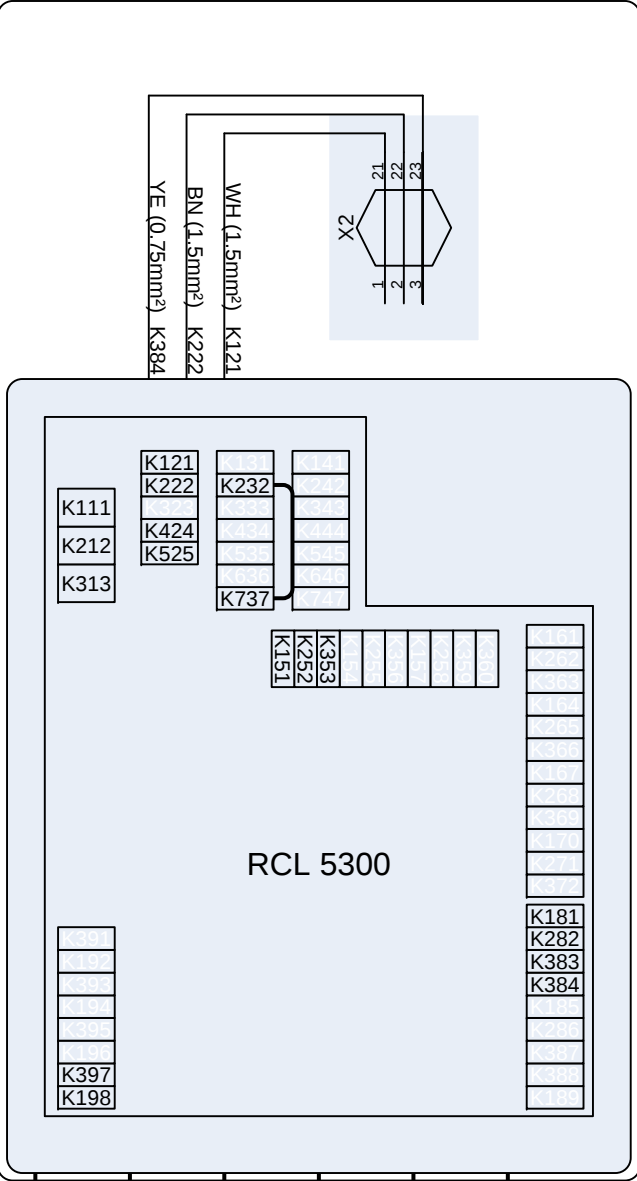


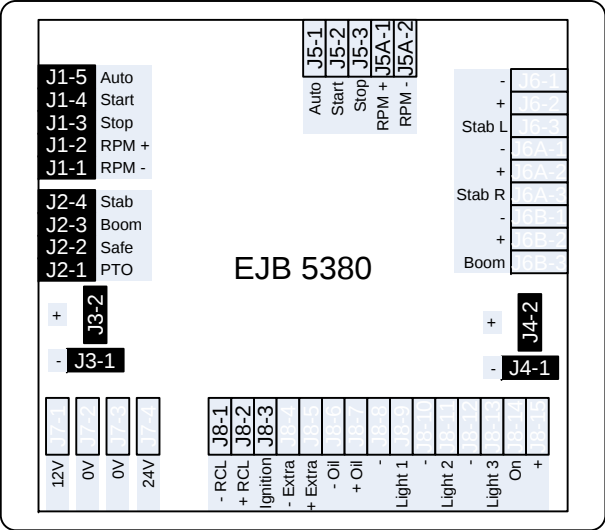

56721 (1A-4B) / 5622 (1A-6B)				
Cable	Wire	Signal	RC Pin no.	Connector Pin no.
1A	1	PWM +	K1.1	1
	2	GND / 0V	K1.2	2
1B	1	PWM +	K1.3	1
	2	GND / 0V	K1.4	2
2A	1	PWM +	K1.5	1
	2	GND / 0V	K1.6	2
2B	1	PWM +	K1.7	1
	2	GND / 0V	K1.8	2
3A	1	PWM +	K1.9	1
	2	GND / 0V	K1.10	2
3B	1	PWM +	K1.11	1
	2	GND / 0V	K1.12	2
4A	1	PWM +	k1.13	1
	2	GND / 0V	K1.14	2
4B	1	PWM +	K1.15	1
	2	GND / 0V	K1.16	2
5A	1	PWM +	K2.1	1
	2	GND / 0V	K2.2	2
5B	1	PWM +	K2.3	1
	2	GND / 0V	K2.4	2
6A	1	PWM +	k2.5	1
	2	GND / 0V	k2.6	2
6B	1	PWM +	k2.7	1
	2	GND / 0V	k2.8	2

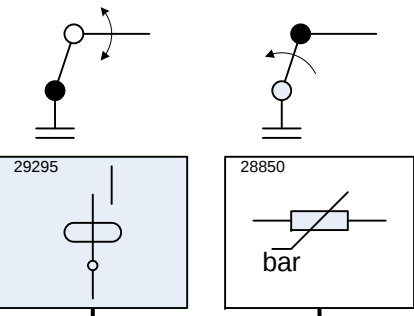

[60]		
+	1	Horn + K4.6
-	2	Horn - K4.7

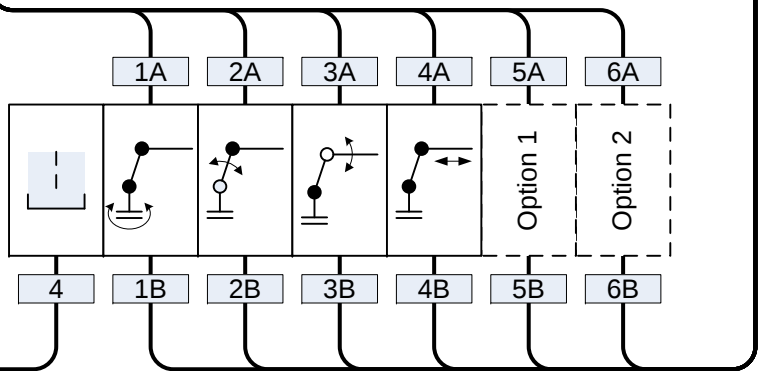

[1] 28278 (4x2,5mm ²)			
J8-1	1 WH	Supply -	K111
J8-2	2 BN	Supply +	K212
J8-3	3 GN	Ignition	K313
	4 YE		

[17B] 28730			
3	BU	-	K181
1	BN	+	K282
4	BK	Horizontal	K383
2	WH		

[5] 29224			
3	BU	-	K151
1	BN	+	K252
4	BK		
2	WH	Press. 1	K353

[EX3]			
K525	1	CAN High	K8.1
K424	2	CAN Low	K8.2
	3		

[RC]			
X2.1	- (2)	Supply -	K7.2
X2.2	+	Supply +	K7.1
X2.3	RC (3)	Wire security	K7.3

[4] 28265			
K198	1 WH	-	1
K397	2 BN	Dump	2

[EX1]			
J5-1	1	RPM auto	K4.1
J5-2	2	Engine start	K4.2
J5-3	3	Engine stop	K4.3
J5A-1	4	RPM +	K4.4
J5A-2	5	RPM -	K4.5

Revision			Product		Date	11.06.2013	Drawing size	
Nr.	Date	Sign.	RCL 5300		Sign.	BWK		
A	11.06.2013	BWK	Part		Replacing			
			NEMRC, G2		Drawing nr.			
					70 21 341 01			
			Højbjerg Maskinfabrik A/S		Rep. by			
			Oddervej 200 - DK-8270 Højbjerg					