

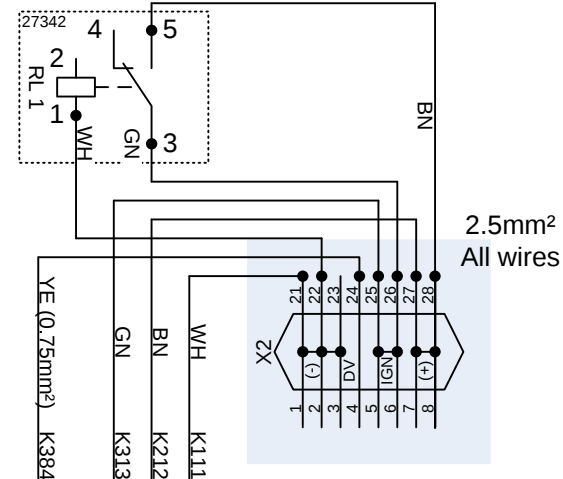
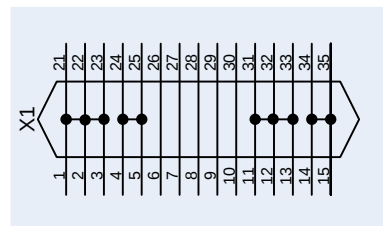


29304
29347


Box 1





2.5mm²
All wires

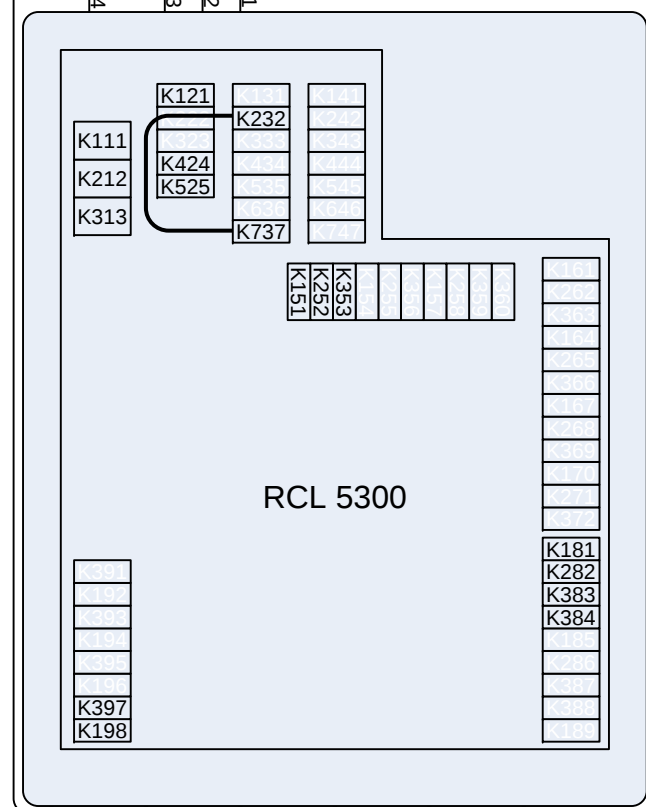

[60]			
+	1	Horn +	K4.6
-	2	Horn -	K4.7

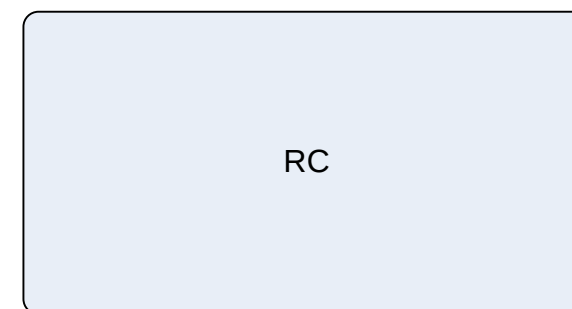

56721 (1A-4B) / 5622 (1A-6B)				
Cable	Wire	Signal	RC Pin no.	Connector Pin no.
1A	1	PWM +	K1.1	1
	2	GND / 0V	K1.2	2
1B	1	PWM +	K1.3	1
	2	GND / 0V	K1.4	2
2A	1	PWM +	K1.5	1
	2	GND / 0V	K1.6	2
2B	1	PWM +	K1.7	1
	2	GND / 0V	K1.8	2
3A	1	PWM +	K1.9	1
	2	GND / 0V	K1.10	2
3B	1	PWM +	K1.11	1
	2	GND / 0V	K1.12	2
4A	1	PWM +	k1.13	1
	2	GND / 0V	K1.14	2
4B	1	PWM +	K1.15	1
	2	GND / 0V	K1.16	2
5A	1	PWM +	K2.1	1
	2	GND / 0V	K2.2	2
5B	1	PWM +	K2.3	1
	2	GND / 0V	K2.4	2
6A	1	PWM +	k2.5	1
	2	GND / 0V	k2.6	2
6B	1	PWM +	k2.7	1
	2	GND / 0V	k2.8	2



[1] 28278 (4x2,5mm ²)			
X1.23	1 WH	Supply -	X2.1
X1.24	2 BN	Supply +	X2.7
X1.26	3 GN	Ignition	RL1.2
	4 YE		


[17B] 28730			
3	BU	-	K181
1	BN	+	K282
4	BK	Horizontal	K383
2	WH		

[5] 29224			
3	BU	-	K151
1	BN	+	K252
4	BK		
2	WH	Press. 1	K353

[EX3]			
K525	1	CAN High	K8.1
K424	2	CAN Low	K8.2
K121	3	-	K8.3

[RC]			
X2.3	- (2)	Supply -	K7.2
X2.5	+ (1)	Supply +	K7.1
X2.4	RC (3)	Wire security	K7.3

[4] 28265			
K198	1 WH	-	1
K397	2 BN	Dump	2

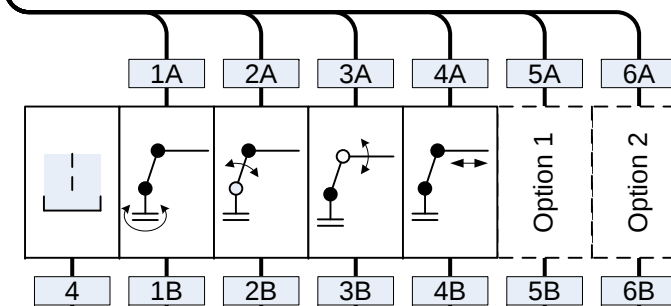

Connection to system			
Signal Type	Power	Min. Cable size	Connect to:
- RCL	0V, 16A	2.5mm ²	Box1:X1.3
+ RCL	24V, 16A	2.5mm ²	Box1:X1.4
Ignition	24V, 0.5A	0.75mm ²	Box1:X1.6
CE Transport	24V, 1A	0.75mm ²	Box1:X1.10
- Other	0V, 16A	2.5mm ²	Box1:X1.11
+ Other	24V, 16A	2.5mm ²	Box1:X1.14

[EX1]			
1	RPM auto	K4.1	
2	Engine start	K4.2	
3	Engine stop	K4.3	
4	RPM +	K4.4	
5	RPM -	K4.5	

Revision		
Nr.	Date	Sign.
A	18.08.2011	BWK

Product		RCL 5300	
Part		NEMRC, G2	
HMF		Højbjerg Maskinfabrik a/s	
		Oddervej 200 - DK-8270 Højbjerg	

Date	18.08.2011	Drawing size
Sign.	BWK	A3
Replacing		
Drawing nr.		
70 21 441 01		
Rep. by		